

Tools Required

- Unit ships assembled. Freestanding unit can be set in place.
- For surface mounting bins: 3/8" dia max non-corrosive anchor bolts (not included). 25 gal bin requires (2), 50 gal bin requires (4).

INSTALLING THE TRASH BAGS:

It is recommended to use 33 gallon bags for the 25 gallon unit and 55 gallon bags for the 50 gallon unit. Bins are intended to be used with bags. Bag hangers are factory installed for this purpose. The bungee cord should be to the outside of the bag hangers. After draping the bag around the bag hangers, pull the bungee cord around the bag hanger to the inside of the unit. Repeat for both sides. Tuck any excess bag into the bin. Replace the lid, ensuring that the bag hangers are inside the lid and the bag is not visible.



HANDLE WITH CARE! The unit's finish can be scuffed by contact with tools, concrete, or other abrasive surfaces. Protect the finish from damage during installation. Use touch-up paint to repair any powder coat finish abrasions.

To open unit: Face litter receptacle opening, reach inside the lid and lift. If equipped with lock, make sure it is unlocked and then lift the lid. See Fig. 1.

INSTALLATION PROCEDURE for SURFACE MOUNTING BINS ONLY:

1. Set unit in position. Concrete mounting surface is recommended.
2. Remove the lid on the unit.
3. Mark the hole locations through the anchor holes provided.
4. Move unit to allow access for drilling holes.
5. Drill holes following all installation instructions from anchor manufacturer. Clear holes of debris.
6. Set unit back in position and install anchor bolts.

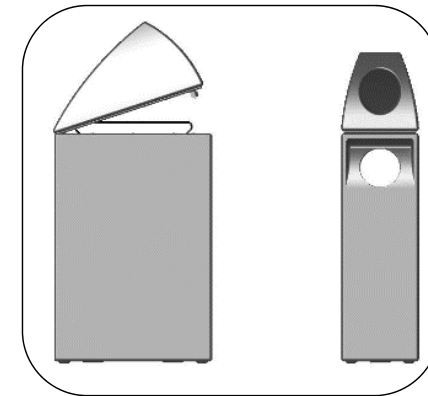


Fig.1 – Remove lid

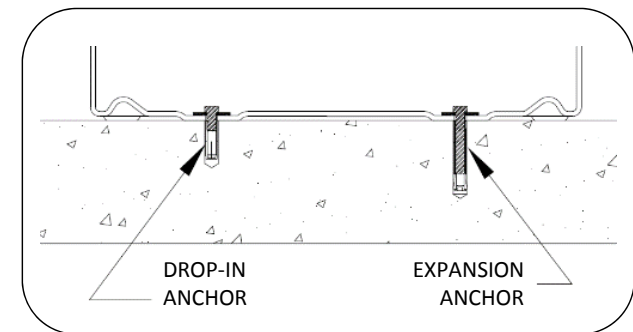


Fig. 2 – options for anchoring bin