

Torres Path Light

landscapeforms®

Product Data Sheet



Torres lights are a beautiful complement to urban landscapes and traditional and contemporary architecture, improving, but not altering, the composition. Advanced LED and optic design provide directed warm white light with superior visibility to extend the safe use of outdoor spaces. Torres lights are cast aluminum and offered in a full color palette finished with Landscape Forms proprietary Pangard II® HAPS, VOC, and lead-free polyester powdercoat.

General Description

- Cast aluminum LED cartridge with round steel pole
- Stainless steel base plate and cover plate
- Surface mounted or embedded mounting option
- Embedded mounted option includes below-grade stainless steel socket
- Zero up-light, International Dark-Sky approved
- UL Listed, suitable for wet locations

Electrical

Surge protected 100V-277V 50/60 Hz, Class 2 driver. LED cartridge with weatherproof quick disconnect provides ease of installation and serviceability. Torres path light ships prewired

Torres Path Light i1

Type 3 Distribution

CCT: 2700K, 3000K, 3500K, 4000K

Drive Current: 500mA

Optic: LEDiL

Lens: Clear injection molded acrylic

Power Supply: 100V-277V

LED Driver: 7W

BUG Rating: B1 U0 G1

IP Rating: IP66 for LED Cartridge

Weight: 16 lbs

Torres Path Light i1

LED lighting facts®
A Program of the U.S. DOE

Light Output (Lumens)	197
Watts	4.2
Lumens per Watt (Efficacy)	46.9

Color Accuracy
Color Rendering Index (CRI) 83

Light Color
Correlated Color Temperature (CCT) 3000 (Bright White)

2700K 3000K 3500K 4000K 4500K 5000K 5500K 6000K 6500K

LED Lumen Maintenance Projection at 50,000 Hours at 25°C Ambient 96.34%

Warranty** Yes

All results, except LED Lumen Maintenance, are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

* Based on TM-21 projections for the light source.
** See www.lightingfacts.com/products for details.

Registration Number: 1Y17-JK7XBG (10/6/2017)
Model Number: Torres Path Light i1
Type: Luminaire - Ballast

Max Intensity: 220 cd

Vertical Plane 55° Max
Lateral Cone 67.5° Max

Grid Spacing Equals 3ft Mounting Height

Torres Path Light

landscapeforms®

Product Data Sheet



Finish

Pangard II®, offered exclusively by Landscape Forms, is a 19 step program of cleaning, priming, and powdercoating that resists rusting, chipping, peeling and fading to produce the finest metal finish available for site furniture and outdoor lighting. In addition, Pangard II® contains no heavy metals and is free of Hazardous Air Pollutants.

To Order

Specify: Product, Lamp, Drive Current, Color Temperature, Input Voltage, Mounting Option, and Powdercoat Color.

Product	Lamp	Drive Current	Color Temp.	Input Voltage	Mounting
AH TORRES	001L3 (11, 1 LED Type 3)	050F (500 mA)	40K (4000K) 35K (3500K) 30K (3000K) 27K (2700K)	UV1 (100-277VAC)	SM (Surface Mount) EM (Embedded)

EXAMPLE: AH – 001L3 – 050F – 35K – UV1 – SM – Powdercoat Color

Product Modifications

Don't see what you are looking for? Our goal is to partner with you as the designer to manufacture solutions needed for the space you are creating. We offer the option to modify our standard product to meet certain design specifications or needs. Contact your local Landscape Forms representative to learn more about these offerings.

Warranty

LED lighting products are warranted for six years.


Other

UL Listed, RoHS Compliant, Dark-Sky Approved



Torres is designed by Rodrigo Torres

[Click here](#) for patent information related to this product

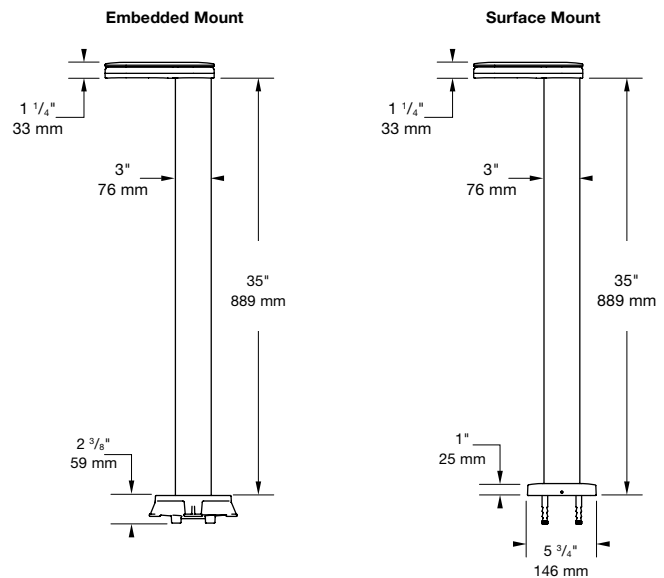

Visit landscapeforms.com for more information. Specifications are subject to change without notice. Landscape Forms supports the Landscape Architecture Foundation at the Second Century level. ©2022 Landscape Forms, Inc. Printed in U.S.A.

landscapeforms.com | specify@landscapeforms.com